

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:


- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04R 1/10	A1	(11) International Publication Number: WO 99/34640 (43) International Publication Date: 8 July 1999 (08.07.99)
(21) International Application Number: PCT/GB98/03908 (22) International Filing Date: 23 December 1998 (23.12.98) (30) Priority Data: 9727357.7 24 December 1997 (24.12.97) GB (71)(72) Applicants and Inventors: WATSON, Michael, Barry [GB/GB]; 50 Churchfield Road, Walton-on-Thames, Surrey KT12 2SY (GB). HERMAN, Richard [GB/GB]; 8 Derby Crescent, Sunbury-on-Thames, Middlesex TW16 5LB (GB). (74) Agent: BUBB, Antony, John, Allen; Gee & Co., Chancery House, Chancery Lane, London WC2A 1QU (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: TRANSDUCER ASSEMBLY  (57) Abstract <p>A transducer assembly for use with an apparatus comprising a sound transmitting earpiece comprises a sound transmitting element (1) adapted to be worn between such an earpiece and the ear, a sound transducer (3), to be located remote from the earpiece and a hollow tube (2) for acoustically coupling the sound transmitting element (1) to the transducer (3).</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TRANSDUCER ASSEMBLY

This invention concerns a transducer assembly adapted to be worn by a person using an auxiliary apparatus including a sound transmitting earpiece, for the purpose of picking up sound signals received from such an earpiece, in addition to the speech of the wearer, and/or for transmitting to the wearer sound signals to supplement those generated by the earpiece.

The auxiliary apparatus comprising the earpiece may, for example, be a mobile telephone, cordless telephone or telephone handset.

It is an object of the invention to provide such a transducer assembly that is less susceptible to electrical interference generated by the apparatus comprising the earpiece.

For example, it has been found that attempts to use a microphone near a mobile telephone or cordless telephone, for the purposes of picking up and recording speech signals together with incoming signals from the mobile telephone, can be defeated by the large amounts of electrical interference generated by such devices. This interference sometimes can be an annoyance up to 0.5 metres from microphone to source and can be particularly troublesome if the microphone transducer is actually or almost in contact with the body of the telephone without some sort of electromagnetic screening between them.

In accordance with the invention there is provided a transducer assembly comprising a sound transmitting element adapted to be worn in the ear, a transducer means for converting sound to electrical signals and/or vice versa, and an elongate hollow conduit extending between said sound

transmitting element and said transducer, the arrangement being such that, in use, with the sound transmitting element located between the ear of the wearer and an external earpiece, the hollow conduit serves to provide coupling between the sound transmitting element and the transducer located at a point remote from the earpiece.

An assembly in accordance with the invention allows a transducer to be located remotely from an apparatus such as a mobile telephone, so that it is free of electrical interference, whilst being acoustically coupled to the space between an earpiece of the apparatus and the ear of the wearer in a surprisingly simple manner. The sound transmitting element to be located between the earpiece and the ear may, for example, comprise a ball-shaped portion of synthetic plastic foam material and the conduit means may be provided by a simple hollow tube of flexible material engaging within the foam material at a point offset from the centre thereof. Very surprisingly a tube having a bore of only approximately 1-2mm in diameter will provide effective acoustic coupling to the transducer over a distance of 0.25-1 metre. The sound transmitting element may alternatively comprise a moulded element of more rigid material shaped to fit the ear and incorporating a sound transmitting aperture providing coupling between the ear and an external earpiece, with a transverse bore enabling coupling between the said aperture and a flexible tube providing the required conduit.

The invention is illustrated by way of example in the accompanying drawings, in which:

Fig.1 is a diagrammatic view of a microphone assembly according to one embodiment of the invention;

Fig.2 is a fragmentary view illustrating a modification of the arrangement of Fig.1;

- 3 -

Fig.3 is a fragmentary view showing a further modification of the arrangement of Fig.1;

Fig.4 is a view showing a yet further modification of the arrangement of Fig.1; and

Fig.5 is a diagrammatic view illustrating a joint in tubing forming part of the device of Fig.1.

Referring to Fig.1, the reference numeral 1 illustrates a ball of foam plastic material dimensioned to fit within the ear of a wearer, whereas the numeral 2 illustrates a length of flexible tubing having a bore of approximately 1-2mm. The reference numeral 3 illustrates a electret microphone or sound transducer that is acoustically coupled to the tubing 2. Reference numeral 4 illustrates a conventional electrical plug for use in coupling the transducer 3 to an external electrical circuit, the housing of the plug serving to enclose the transducer 3.

The distance between the foam ball 1 and the plug 4 may be in the region of 0.25-1 metre, and in use the foam ball 1 is inserted into the ear, with the plug 4 inserted into a device such as a tape recorder. Surprisingly, when the earpiece of a mobile phone is placed against the ear, the acoustic coupling provided by the assembly is sufficient to enable recording both of the speech of the wearer of the device and of incoming signals from the mobile telephone, without the attendant electrical interference that would occur if the transducer were in the region of the ear of the wearer.

The offset ball-shaped foam element 1 allows for maximum variation between ear shapes and sizes whilst reducing fatigue with prolonged use of the device.

However, a variety of modifications may be made to the

device of Fig.1 without departing from the scope of the invention.

Thus, the ball-shaped foam element 1 may be replaced by other shapes that might include a football, a golf ball, or any other such representation of a device appropriate to a particular commercial product, for example a horses head.

Alternatively, as shown in Fig.2, the element 1 may be replaced by an element 5 of hard plastic material, such as that provided on a conventional earphone. The hollow interior of the member 5 may be closed by a foam cover 6 and the tube 2 may be inserted through a transverse hole in the element 5 for acoustic coupling with the transverse hole thereof.

As shown in Fig.3, the element 1 or 5 may be omitted if the end of the tubing 2 is formed into a hook-shape to fit into the ear. The tubing 2 may be shaped by heating and bending, or may be supported in this shape by an internal member pushed into the end of the tube.

As shown in Fig.4, the flexible tube 2 can be provided with one or more small holes 2a at about mouth distance from the sound transmitting element 1 to provide additional sound level from the operator when speaking.

As shown in Fig.5, the flexible tube 2 can be cut and rejoined using an internal (or external) short length of solid or flexible hollow tubing 7. This allows the operator to cut the tubing to a more convenient length and then to rejoin it. Also, if the junction point is near the element 1, the latter can easily be removed for cleaning.

Various other modifications and alterations may be made to the assembly without departing from the scope of the invention. Some variations may be summarised as follows.

The flexible sound tube 2 can be rubber or plastic or a combination of materials. The colour can be any plain colour or translucent or clear or printed to suit any promotional situation, e.g. the British flag or the American "Stars and Stripes" etc., or indeed a company name or logo.

A length of fine thread or string or other material or plug of material might be used to modify the tonal characteristics of the assembly by inserting it inside the sound tube 2.

The flexible sound tube 2 can be coiled like telephone handset flex.

The sound tube 2 can be shaped to assist sound levels, e.g. tapered from one end.

The sound tube 2 can be stretched so as to cover the microphone capsule 3 or the capsule can have a tube arrangement to facilitate easier putting on and removal of the sound tube 2.

The microphone capsule 3 can be an electret or a magnetic or piezo or ceramic or other transducer.

This could also include a transducer capable of sending information instead of receiving it.

The plug 4 can be male or female and its rear cover conceals the microphone capsule 3. The rear cover can also be of metallic material, e.g. nickel plated brass to help electromagnetically screen the transducer and its connections to the plug.

A stereo plug would permit separate connections to sender

- 6 -

transducer and receiving transducer. Separate parallel tubes or co-axial tubes or a single tube would act as the transmission path between plug and operator. This would be particularly useful when 'patching' between mobile or normal landline telephones and for example a radio transmitter with suitable input circuitry.

Electronic circuitry to alter the volume level or to modify tonal response or to compensate for the tonal alterations due to the tubing may be placed inside the plug cover using microelectronic techniques.

The mouthpiece hole 2a can have a flexible tube (thinner than the sound tube 2) passed through it acting so as to convey speech down next to the microphone capsule 3, the extra tube to run internal to the sound tube and entering through a hole made in the sound tube at about mouth distance from the ear end of that tube. The lower end of the inner sound tube can extend only a short distance down inside the outer sound tube or it can extend all the way down almost making contact with the microphone capsule 3. This additional inner sound tube will act so as to alter the sound balance between the ear end of the outer sound tube and the sounds uttered by the operator. The hole made to reinforce the sounds uttered by the operator might (instead of inserting an inner sound tube) have a hollow plastic or metal tapered or untapered tube inserted downwards into it to convey sounds uttered by the operator down a short distance into the outer sound tube.

The auxiliary sound tube can be run from about mouth level in use down outside the main sound tube to join it further down near the microphone capsule. It can thus be the same or even larger than the tube to the ear. A convenient form would already be manufactured to have a figure of eight cross section and the final 150mm say of tubing at the ear end can be removed to bring its opening down to mouth

- 7 -

level. The lower end could then be joined in a Y connection so that both sound sources reach the microphone together.

CLAIMS

1. A transducer assembly comprising a sound transmitting element adapted to be worn in the ear, a transducer means for converting sound to electrical signals and/or vice versa, and an elongate hollow conduit extending between said sound transmitting element and said transducer, the arrangement being such that, in use, with the sound transmitting element located between the ear of the wearer and an external earpiece, the hollow conduit serves to provide coupling between the sound transmitting element and the transducer located at a point remote from the earpiece.
2. An assembly as claimed in Claim 1, wherein said conduit comprises a hollow tube of flexible material.
3. An assembly as claimed in Claim 2, wherein said hollow tube has a bore of 1-2 mm in diameter.
4. An assembly as claimed in Claims 2 or 3, wherein said hollow tube has a length of 0.25 - 1 metre.
5. An assembly as claimed in any one of Claims 2-4, wherein said hollow tube has one or more apertures in the wall thereof in a position such that the said one or more apertures can be located adjacent the mouth of a user when said sound transmitting element is located in an ear of the user.
6. An assembly as claimed in Claim 5, wherein said hollow tube has a single said aperture and an auxiliary hollow tube of smaller diameter than the first is arranged to pass through said hole and extend within the larger hollow tube in a direction towards said transducer.
7. An assembly as claimed in any one of Claims 2-6, wherein said hollow tube has a length of string or thread extending

therein to modify its tonal characteristics.

8. An assembly as claimed in any one of Claims 2-7, wherein said sound transmitting element comprises a shaped body of synthetic plastic foam material penetrated by said hollow tube.

9. An assembly as claimed in any one of Claims 2-7, wherein said sound transmitting element comprises a hooked end of said hollow tube.

10. An assembly as claimed in any one of Claims 2-7, wherein said sound transmitting element comprises a member shaped to fit the ear and having a sound transmitting aperture acoustically coupled to said hollow tube via a transverse bore.

1/1

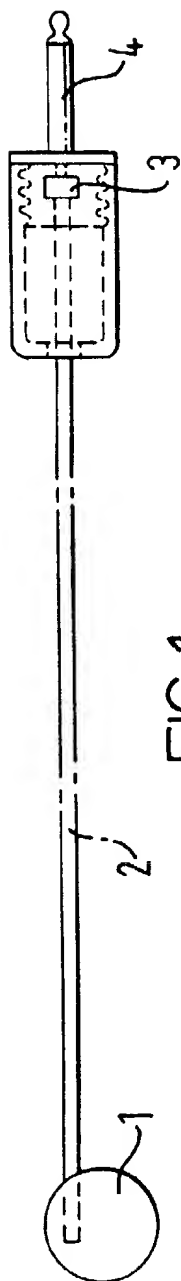


FIG. 1

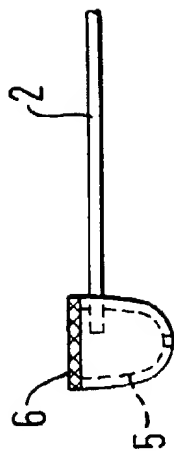


FIG. 2




FIG. 3

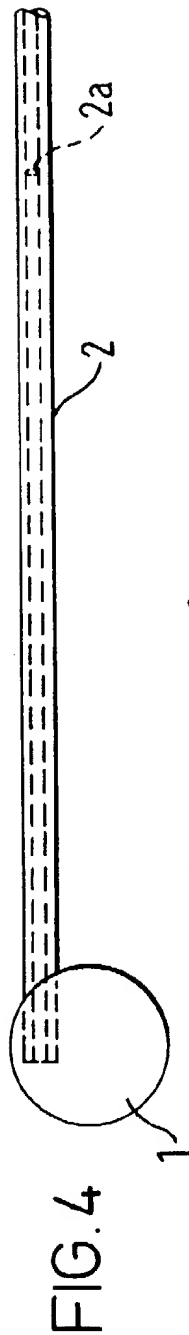


FIG. 4

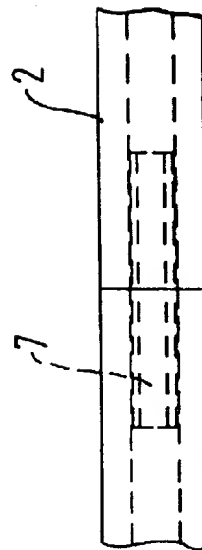


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 98/03908

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04R1/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04R H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 18, no. 535 (E-1615), 12 October 1994 & JP 06 188960 A (MATSUSHITA), 8 July 1994	1-4, 8
A	see abstract	5-7, 9, 10
Y	US 4 293 742 A (SATO ET AL.) 6 October 1981 see column 2, line 12-29	1-4, 8
A	WO 95 34156 A (THE CREATIVE SOLUTIONS COMPANY) 14 December 1995 see page 1, line 3-5 see page 2, line 11 - page 3, line 30 see page 5, line 11 - page 6, line 10	1-10
A	US 4 878 560 A (SCOTT) 7 November 1989 see column 1, line 52 - column 2, line 48	1, 3, 10



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

7 June 1999

Date of mailing of the international search report

14/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Zanti, P

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/03908

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4293742 A	06-10-1981	NONE	
WO 9534156 A	14-12-1995	US 5613222 A	18-03-1997
US 4878560 A	07-11-1989	NONE	